



**WIRING DETAIL**

NO SCALE

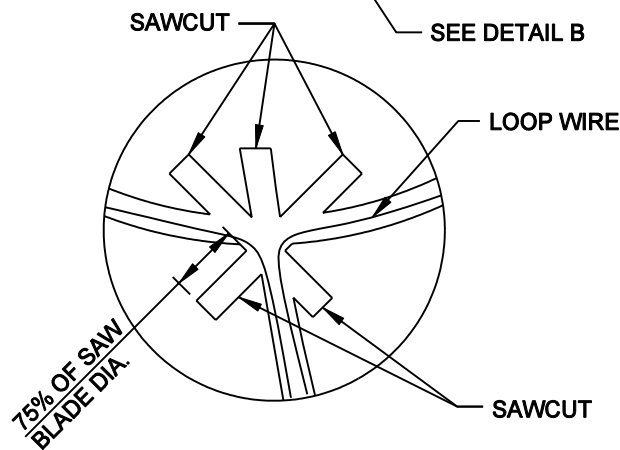

**DETAIL A**

NO SCALE

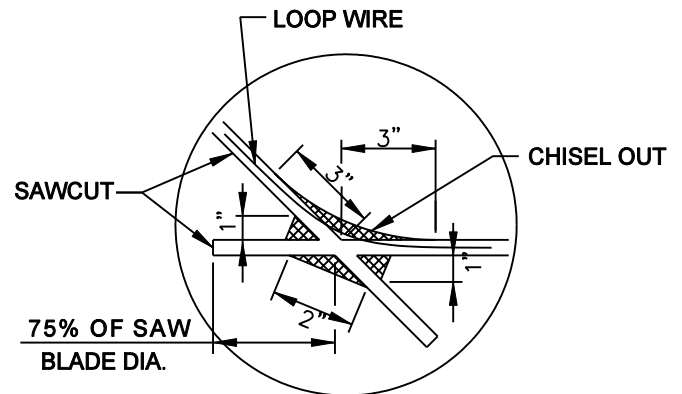

**DETAIL B**

NO SCALE

**NOTES:**

1. DEPTH OF SAWCUT SHALL BE 2.5" UNLESS SPECIFIED OTHERWISE (2.75" AT PAVEMENT JOINTS)
2. ALL AREAS WHERE LOOP WIRES ARE TO PLACED SHALL HAVE A UNIFORM DEPTH AND SMOOTHNESS.
3. LOOP SEALANT SHALL BE CRAFCO MSI 34271. APPLY PER MANUFACTURERS RECOMMENDATIONS.
4. LOOPS SHALL HAVE 3 TURNS OF WIRE FOR HOME RUNS LESS THAN 400', AND 4 TURNS OF WIRE FOR HOME RUNS GREATER THAN 400'.

APPROVED: DON CAIRNS

REV. DATE: NOVEMBER 01, 2005

TRANSPORTATION DIVISION



STANDARD DETAILS

**LOOP DETECTOR SAWCUT**

FILE	SD455.DGN	DRAWING NO.	455
------	-----------	-------------	-----